



Unterleitverlängerung (Stromwandler)
Lengthening for current transformer

L6	L16	L	Weight(kg)
600	1615	5310	850

SCHNITT A A

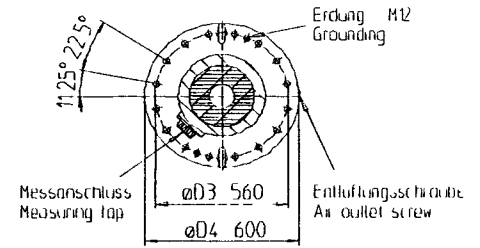

Technische Daten
Technical data

Isolationsklasse (50/60Hz)	330 kV
Rated voltage	330 kV
Spannung Phase Erde	190 kV
Voltage phase to ground	190 kV
Prüfspannung 1 Min. trocken/nass	370 kV
Test voltage 1 min. dry/wet	370 kV
BIL 1 2/ 0us	1300 kV
Testentlastung level 5pC (2xIn/50p3)	380 kV
Partial discharge level	
Fadenmaß	2740 mm
Air gap distance	
Kriechstrecke min	Lks-10000 mm
Creepage distance min	
Prüfbiegebelastung 1 Min	4000 N
Canfillevel test load	
Mit kompressibler Füllmasse MICAFIL	
With compressible filler MICAFIL	

Installation (max 2000m u M) senkrecht bis 45° geneigt
Installation (max 2000m a s l) vertical inclined up to 45°

Max Betriebsstrom	
Max operating current	
L6	600 uo A

Kondensator (Dichtung) Outdoor - Oil für Transformatoren
Condenser bushing Outdoor - oil for transformers

U 110 - 110 M13, 10
0.16

MICAFIL
RTXF 330-1300/2500 T spez

Dat. 10300 E
+ Visu
E. S. für

HLJM151474

For use only in the countries where the MICAFIL is registered.
Für den Einsatz nur in den Ländern, in denen die MICAFIL registriert ist.
A. I. G. S. S. P. A. - Via S. Rocco 10 - 20138 Milano - Italy
Tel. 02/76001 - Telex 320750 - Fax 02/76002