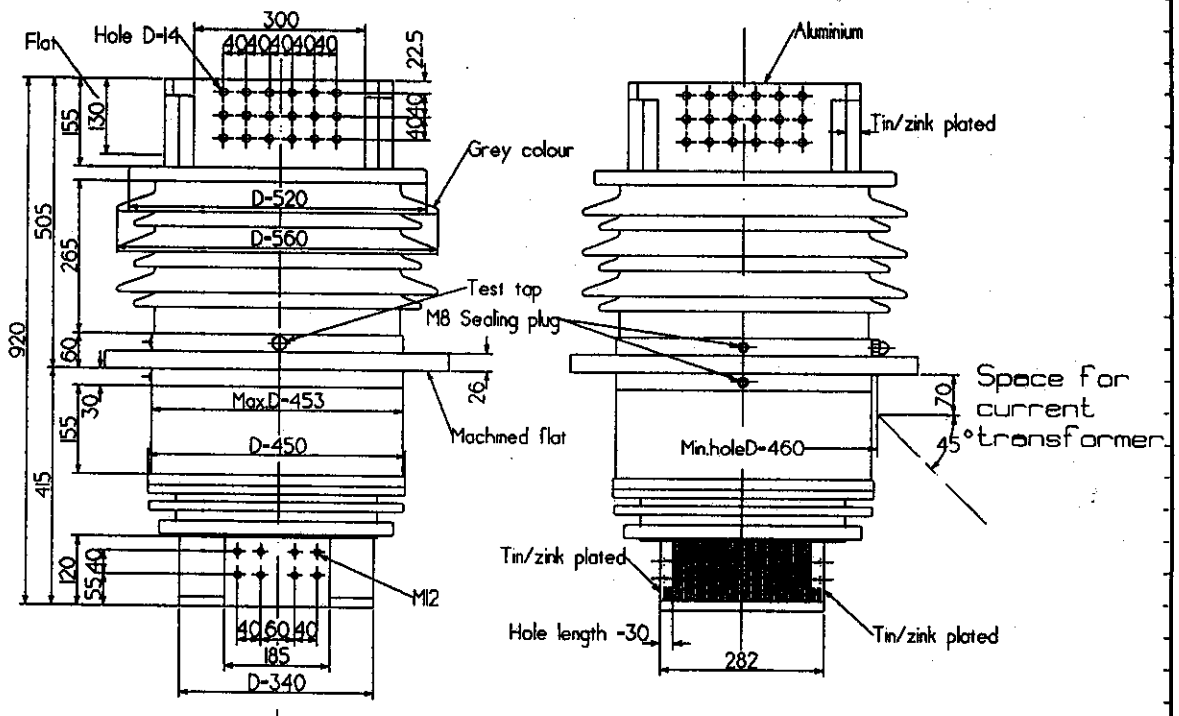

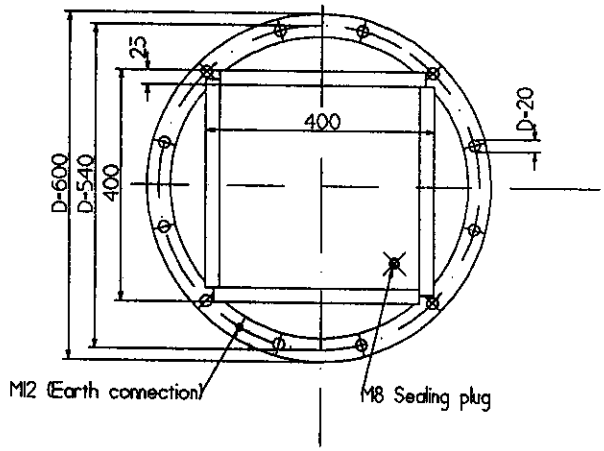

Rating	IEC	ANSI
Rated voltage (kV)	36	-
Phase to ground max. (kV)	36	22
Power frequency wet (kV)	70	75
Power frequency dry (kV)	70	80
Lightning impulse (kV)	170	200
Insulation class (kV)	-	34.5
Current carrying capacity acc to B COM 1002E		
Creepage distance 760 mm		
Mass 280 kg		
Catalogue number LF 126 009-B		

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.
© ABB 19

Rev Ind	Revision	Appd	Year	Week

Accepted by qual control

Accepted for prod by

Description (English): BUSHING GOH 170-25

Design checked by: Heyman

Drawn by: Jansson

Description (own language): GENOMFÖRING GOH 170-25

Drawing checked by: Holmström

Issued by Dept / Year / Week: COM/KB 91 48

ABB Components

2751 312-20

Lang | Sheet: 1

Rev Ind | Cont: -

Drawn by | Design checked by | Form No. | Rev Ind | Dept | Year Week | Cont. | Sheet

6917 5300-BA(A4) Rev2